



## I/O PIN ASSIGNMENTS

### J1 INPUT - DCM21WA4P


J1 - A2	INPUT ØC
J1 - A3	INPUT ØB
J1 - A4	INPUT ØA
J1 - 1	REMOTE SENSE
J1 - 2	REMOTE SENSE RTN
J1 - 3	LOCAL SENSE RTN
J1 - 4	LOCAL SENSE
J1 - 9	CHASSIS GND
J1 -10	PROGRAM

### J2 OUTPUT - DCM8W8P

J2 - A1	28 V
J2 - A2	28 V
J2 - A3	28 V
J2 - A4	28 V
J2 - A5	28 V RTN
J2 - A6	28 V RTN
J2 - A7	28 V RTN
J2 - A8	28 V RTN

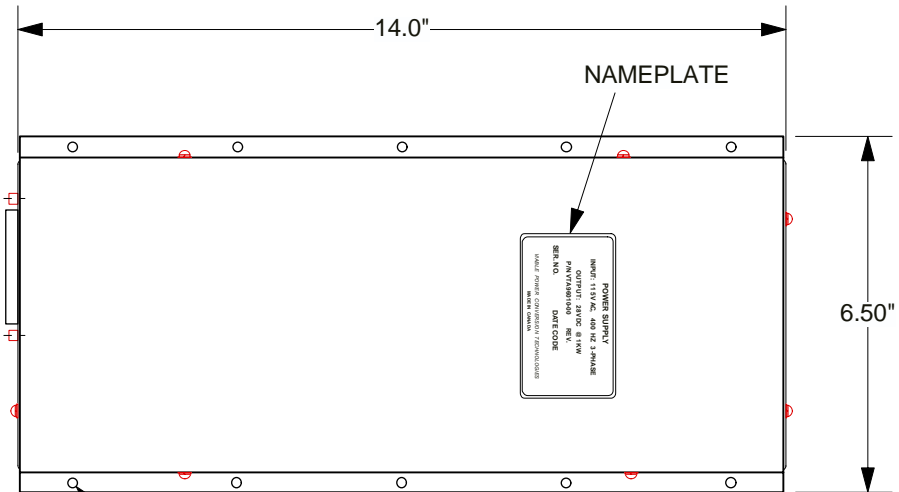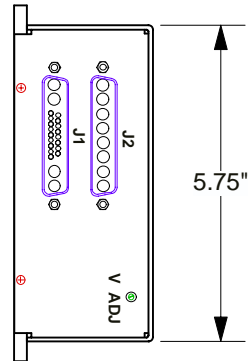

Ø .188 MOUNTING HOLES  
(10 PLACES)

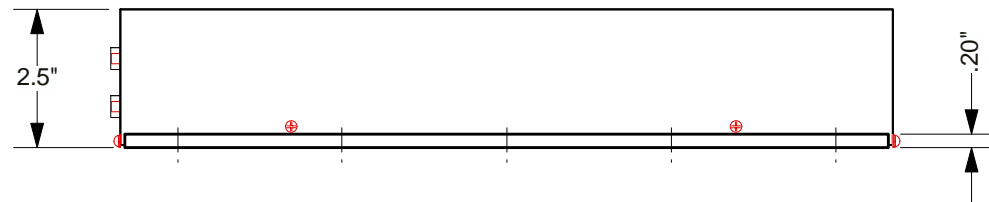

**WEIGHT:** 7.4 lbs. (3.34 kgs.)

3AJØ3

<i>Viabie Power Conversion Technologies Inc.</i>			
DRAWN:	J.STEPIEN	115V L-N 400Hz 3Ø 1000W AC-DC PSU 28V / 36A	
DATE:	03.OCT.97		
CHKD:			
DATE:			
APPVD:			
DATE:			
Scale 1:3.5	Sheet 1 of 1	size A	Dwg. No. VOI 96010-00
			Rev. -